

FULLY - AUTOMATED DIE BONDER

T-6000-L

The **T-6000-L** Die Bonder is an all purpose system for R&D, pilot and medium size production. Die handling is standard from Wafer, Waffle-Pack and Gel-Pack. Automatic Die assembly utilizing pattern recognition is combined with ease of use operation and suited for manual single Die placement.

Automatic Die Bonding


Pattern recognition system

Step resolution 1 μm
in all axis

Easy to use

MICRO ASSEMBLY

T-6000-L

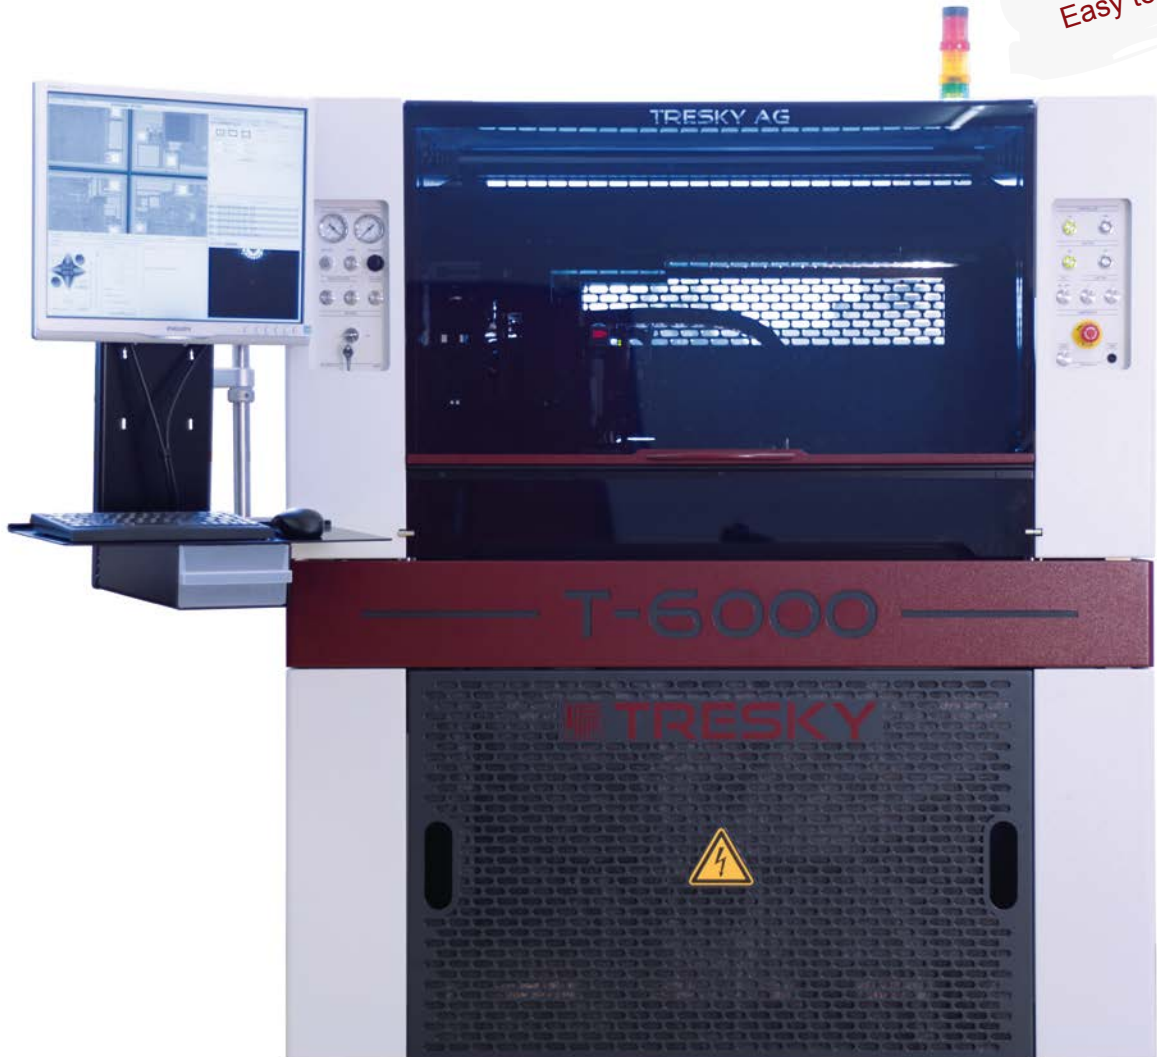

TRESKY

Dr. TRESKY AG

Switzerland

Email: tresky@tresky.com

www.tresky.com

Sophisticated accessories and rapid tool exchange grant high-precision bonding, outstanding flexibility and efficient automation.

The graphical intuitive interface makes the system easy to operate. Status overview at a glance and menu prompting provide immediate, simple access to all system functions.

APPLICATIONS:

Die Attach, Die Sorting, Flip-Chip, MEMS, MOEMS, VCSEL, Photonics, Ultrasonic, Thermosonic, RFID, Sensor Assembly, Adhesive Bonding, Eutectic Bonding,

FEATURES AND OPTIONS:

Graphical User Interface: Java based, user optimized for Quick manual Pick & Place, semi automatic and automatic assembly with pattern recognition



- > Up looking camera
- > Dispensing & Stamping unit
- > Holder for Pick-Up tool
- > Tool magazine (for automatic exchange of the tools)
- > Eutectic bond unit
- > Customized substrate holder
- > Customized waffle pack holder
- > Wafer rings or wafer frames
- > Automatic 3-D calibration



TECHNICAL DATA:

XY- Movement (placement stage):	400mm x 315mm
XY- Movement (wafer stage):	220mm x 220mm
Z- Movement:	100mm
Spindle Rotation:	360°
Bond Force (standard range):	15g - 800g (optional up to 30N)
UPH:	2000
Placement accuracy:	±8µm @ 3Sigma (process depending)
Connections:	Compressed air 6 bar / Vacuum 0.6 bar (abs)
Dimensions:	1360mm x 995mm x 1690mm
Weight:	720kg (approx.)
Voltage:	220V-260V, 50Hz, 2.3kW single line

Note: All specifications are subject to change without notice

REPRESENTED BY:

HEADQUARTERS

Dr. TRESKY AG

Boehnrainstr. 13
CH-8800 Thalwil
Switzerland
Tel.: +41 44 772 1941
Fax: +41 44 772 1945
tresky@tresky.com

TRESKY GmbH

Oranienburger Chaussee 31-33
D-16548 Glienicke / Nordbahn (Berlin)
Germany
Tel.: +49 33056 275 411
Fax: +49 33056 430 235
info@tresky.com

TRESKY Corporation

704 Ginesi Drive, Suite 11A
Morganville, NJ 07751
USA
Tel.: +1 732 536 8600
Fax: +1 732 536 0495
sales@tresky.com

www.tresky.com

